


Order-No. 645/5000

Tandem-Low bed trailer (loading area above axles) with sideways adjustable ramps

Weights	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	5000 kg 500 kg 3450 kg 1550 kg
Measures	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	4000 x 2300 mm 400 mm 810 mm 1800 mm max. ca. 1050 mm 5980 x 2450 mm
Ramps:	length approx. width approx. elevation approx.	1800 mm 550 mm 17° degree
Tyres:	size	215 R 14 C 4-times

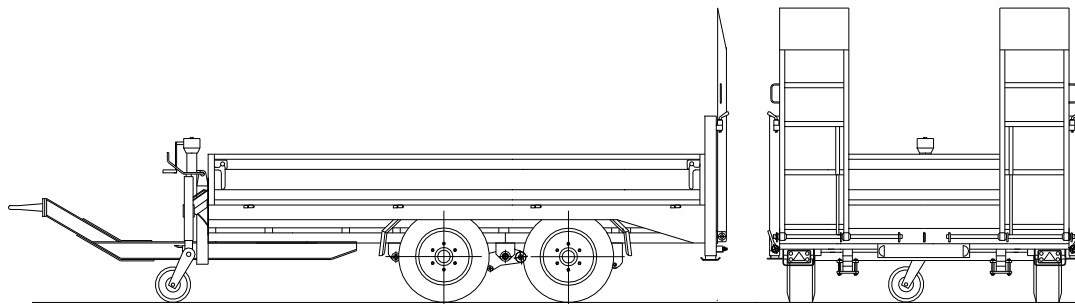

- Axles:** Fast-running Knott axles with cam brakes, leaf springs and weight adjustment
- Brakes:** Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Sturdily electro welded steel construction made of steel shades; through short distances between the cross beams for high punctual load appropriate
- Upper body:** Sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; lashing eyes in the corners with 4000daN; lashing rings with 2500daN (approx. 1,25m in between) embedded in the side profiles; wooden bottom made of spruce wood with tongue and groove, 34mm strong; approx. 0,60m of the loading area is bevelled in the back, drive-through width approx. 2,20m
- Support:** Adjustable support wheel in front; two parking supports in the corner posts in the back assured by support legs
- Ramps:** Sideways adjustable steel ramps with wooden facing and back beam; gas-filled shock absorber as a lifting support for one-man-control, ramps lockable with socket pins
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached on the steel frame, LED -position- and marker lights sideways); 24 voltage, 7+7 - or 15-poles depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support

