


Order-No. 566/8900

Tandem-Machine transport trailer „AWST“ (loading area between axles) with sideways adjustable ramps – especially for the transport of milling machines and fork lifts, with COC

Weights:	total weight thereof supportive load maximum payload in standard model approx. empty weight approx.	8900 kg 500 kg 6780 kg 2120 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx. coupling height empty approx. total measures length x width approx.	4500 x 2030 mm 370 mm 690 mm 1800 mm max. ca. 1020 mm 6650 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	2000 mm 500 mm 12° degrees
Tyres:	size	215/75 R 17,5 4-times

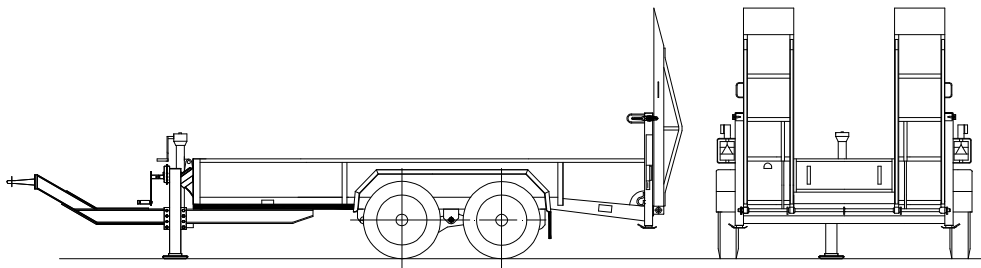

- Axles:** Fast-running axles type GFA, with cam brakes, leaf springs and weight adjustment
- Brakes:** Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Self-supporting, buckling resistant frame as sturdy electro welded steel construction made of steel shades
- Upper body:** Sidewalls made of steel, front- and sidewalls are strengthened, all steel parts are welded, mud guard made of edged steel plate, solidly welded and accessible, mit clearpass flap, plywood wall (made of 18mm strong plywood) between the ramps; lashing hooks in the corners with 4000daN, three pair of lash rings with 2500daN embedded in the trailer bottom (approx. 1,25m in between); impregnated wooden bottom made of spruce wood with tongue and groove, 34mm strong, as well as an additional 18mm strong top layer made of film coated plywood; approx. 1m of the loading area is bevelled in the back, side protection in front
- Support:** Support winch in front with load and fast gear, two parking supports in the corner posts in the back assured by support legs
- Ramps:** Sideways adjustable steel ramps with wooden facing and back beam; gas-filled shock absorber as a lifting support, ramps lockable with quick release clamps
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached in a steel frame, LED-position-, track and side marker lights); 24 voltage, 7+7- or 15-poles depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with handle, with EC type approval (COC), homologation documents