

Your trailer - custom-made

Blomenröhr
Ihre innovative Anhänger Manufaktur



Minitrailer

	414/2100	428/2750	434/3150	441/3500	441/3500 upgraded
Total weight in kg	2100	2750	3150	3500	3850
Payload in kg approx.	1570	2150	2400	2700	2930
Loading area in mm - min	3000x1600	3000x1600	3000x1700	3000x1700	3500x1700
Loading area in mm - max	3000x1600	3500x1600	3500x1900	4000x1900	4000x1900
Loading height unloaded in mm	540	540	560	560	560
Drawbar in standard equipment	Straight drawbar with car coupling	Straight drawbar with car coupling	Straight drawbar with car coupling	V-drawbar with car coupling	height adjustable drawbar with 40mm towing ring
Gas springs as lifting support			✓	✓	✓

all Minitrailers can be built to the customer's request - other loading measures or equipment are possible



➔ **This is why Blomenröhr Minitrailers are longer-lasting than other trailers – even in hard use at construction sites:**

- ➊ Maintenance free, oversized rubber spring axle
- ➋ Self-sustaining strong chassis construction, electrically welded
- ➌ Impregnated wooden floor with tongue and groove 30mm thick
- ➍ Ramps made of steel with surface of perforated plates, sideways adjustable
- ➎ Two pair of lashing hooks in the floor with 1500daN
- ➏ 4 lashing hooks in all corners, 2000daN
- ➐ Guard between the ramps
- ➑ Fixed supports at the ramps
- ➒ Strong support wheel (min. 400kg load capacity)
- ➓ Mudguard made of steel, strongly welded to chassis and accessible
- ➔ Strengthening of the sidewalls
- ➔ Ramming protection and climbing aid, for export also with front side protection
- ➔ Back lights and locks protected by steel frames
- ➔ High ground clearance of >25cm
- ➔ Here with height adjustable drawbar and truck coupling

Serial equipment

Pictures partly with supplemental equipment. Technical modifications reserved. This information is supplied without liability.



Height adjustable drawbar (up to 3150kg TW)




Height adjustable drawbar (model 441/3500)



Big support wheel with 700kg support load - mounted at the strengthened frontwall



Shelf for excavator shovel - Hardwood wedge and/or tray table mounted at the front wall

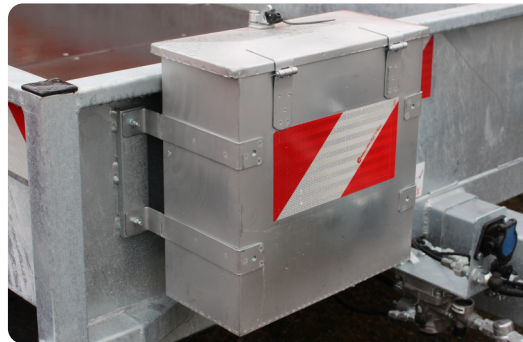

Box made of zinc coated steel sheet and warning signs



Closed loading ramp, 1x lengthway divided



Ramps inserted underneath the loading area, with rear lid



Varnishing in the colour at buyer's option instead of galvanizing



Double storage box - to be loaded from above and through flaps from the sides

as well without photos: different loading measures, net hooks, further lashing points, spare wheel and holder, winch, ramps with wooden surface etc.



Minitrailer for the transport of lifting platform



Minitrailer with section in front, closed loading ramp with wooden surface



Tarpaulin top, strong support wheel and height adjustable drawbar



Minitrailer with attachment for leaves and box at the front wall



Minitrailer with mounted compressor and aluminium-chequer plate floor

Special vehicles

Blomenröhr Fahrzeugbau GmbH
Schneidweg 31
59590 Geseke | Germany
Tel. +49 2942 57997-70
Fax +49 2942 57997-77
info@blomenroehr.com
www.blomenroehr.com

