


**Order-No. 651/6900**

**Tandem-Low bed trailer (loading area above axle) with sideways adjustable ramps**

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	6900 kg 500 kg 4900 kg 2000 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	4500 x 2450 mm 400 mm 850 mm 1800 mm max. ca. 1020 mm 6650 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	2000 mm 550 mm 17° degrees
Tyres:	size	215/75 R 17,5 4-times

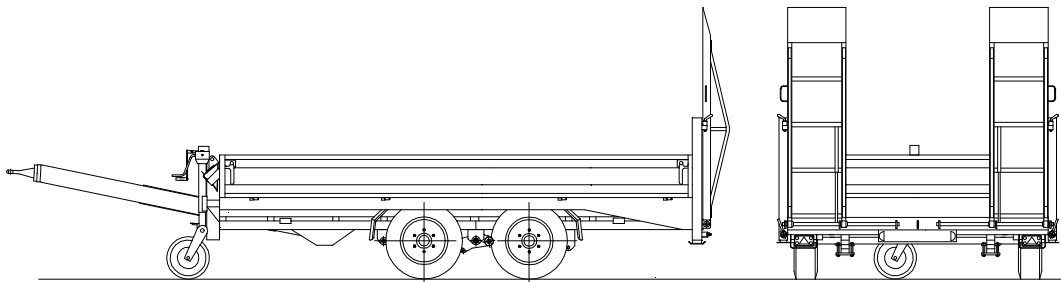

- Axles:** Fast-running axles type Knott with S-cam brakes, leaf spring and weight adjustment
- Brakes:** Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Sturdily electro welded steel construction made of steel shades; through short distances between the cross beams for high punctual load appropriate
- Upper body:** Steel sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; lashing eyes in the corners with 4000daN; lashing rings with 2500daN (approx. 1,25m in between) embedded in the side profiles; wooden bottom made of spruce wood with tongue and groove, approx. 44mm strong; approx. 0,80m of the loading area is bevelled in the back, drive-through width approx. 2,35m
- Support:** Support winch in front with load and fast gear; two parking supports in the rear corner posts with a safety-catch
- Ramps:** Sideways adjustable steel ramps with wooden facing and back beam; gas-filled shock absorbers for one-man-control, lockable with a quick release clamp
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached on the steel frame, LED-track-, position- and marker lights sideways); 24 voltage, 7+7 - or 15-pole depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support, contour marking in accordance with ECE-R 104