


Order-No. 845/5000

Tandem-three side tipper and low bed trailer, with slide-in aluminium loading ramps

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	5000 kg 500 kg 3100 kg 1900 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	4000 x 2300 mm 400 mm 850 mm 1800 mm max. approx. 1020 mm 6000 x 2400 mm
Ramps:	length approx. width approx. elevation approx.	3000 mm 300 mm 16° degrees
Hydraulic system:	Tilting angle backwards /sideways approx. oil consumption approx.	45°/45° degrees 4,2 litres
Tyres:	Size	215 R 14 C 4-times

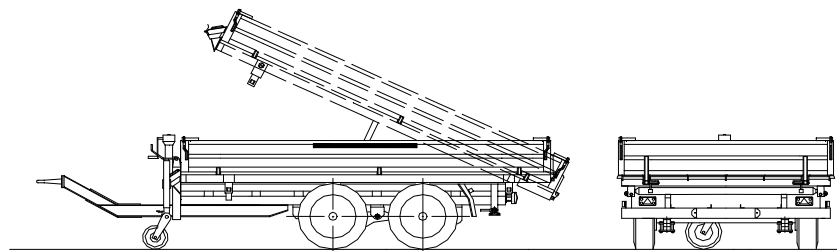

- Axles:** Fast-running Knott axles with cam brakes, leaf spring and weight adjustment
- Brakes:** Pressure air brake, testing sockets, connection hoses with mix-up safe couplings, antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured hollow profile of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Electro-welded, sturdy construction made of prime steel
- Upper body:** Bridge floor made of 4mm fine grained steel QSTE 380; tilt frame made of a robust construction with half ball shells (noise absorbing); sidewalls laser welded and can be folded sideways by strong hinges; tailboard oscillating; corner posts pluggable in the back; lash trays (2500daN) approx. every 1,25m embedded in the bottom, 2 lash eyes in front (4000daN), 2 lash rings in the back (4000daN) welded on
- Hydraulic system:** Motor-hydraulic; with heavy 3-step tip cylinder and lift limiter; plug coupling and single circuit connection
- Support:** An adjustable support wheel in front; two parking supports in the back assured by support legs
- Ramps:** Aluminium loading ramps, can be stored below the loading area; supported by rolls; can be locked by a strong steel valve; bearing load/pair 3500kg; weight approx. 37 kg a piece
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached on the steel frame, LED-track- and position-lights sideways); 24 voltage, 7+7 - or 15-pole depending on customers request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with handle; TÜV-homologation