


Order-No. 414/2100

Tandem-Mini low bed trailer with sideways adjustable ramps

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	2100 kg 100 kg 1570 kg 530 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	3000 x 1600 mm 280 mm 540 mm 1300 mm 400 mm 4850 x 2100 mm
Ramps:	length approx. width approx. elevation approx.	1500 mm 440 mm 18° degrees
Tyres:	Size	14" 4-times

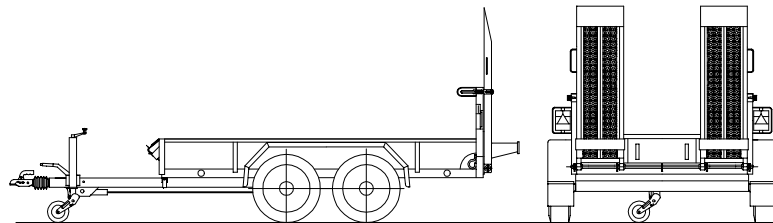

- Axles:** Maintenance-free rubber spring axles with precision bearings
- Brakes:** Surge brake system (with effect to all tyres); immobilisation brake
- Drawbar:** Straight drawbar with car-coupling
- Chassis frame:** self-supporting, buckling resistant frame, sturdily electro welded steel construction made of steel shapes; deep lying focal point between the tyres
- Upper body:** Sidewalls made of steel, front- and sidewalls are strengthened, mudguards made of steel plate, welded on solidly and accessible, plywood wall between the ramps; impregnated wooden bottom made of spruce wood with tongue and groove 30mm strong; lashing hooks in the corners (2000daN) and two pairs of lash rings embedded in the trailer bottom (1500daN)
- Support:** Support wheel in front, fixed support feet on the ramps
- Ramps:** Made of zinc coated perforated metal plate; sideways adjustable and easy to lock by an eccentric clasp
- Electric:** Lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light with an integrated back-up light and a fog warning lamp attached on the steel frame, marker lights sideways, position lights in front); 12-voltage, 13-pole connecting plug
- Varnishing:** Vehicle is galvanized, rims in silver
- Accessories:** Two brake shoes with handle; EC type approval/COC