


Order-No. 428/2750

**Tandem-Mini low bed trailer with sideways adjustable ramps**

|           |  |   |
|-----------|--|---|
| Weights:  | total weight<br>thereof tongue weight<br>maximum payload in standard model approx.<br>empty weight approx.   | 2750 kg<br>150 kg<br>2150 kg<br>600 kg                                    |
| Measures: | loading area inside approx. (length x width)<br>side height<br>loading height empty approx.<br>drawbar length approx<br>coupling height empty approx.<br>total measures length x width approx. | 3000 x 1600 mm<br>280 mm<br>540 mm<br>1300 mm<br>400 mm<br>4850 x 2100 mm |
| Ramps:    | length approx.<br>width approx.<br>elevation approx.   | 1500 mm<br>440 mm<br>18° Grad   |
| Tyres:    | size   | 14" 4-times   |

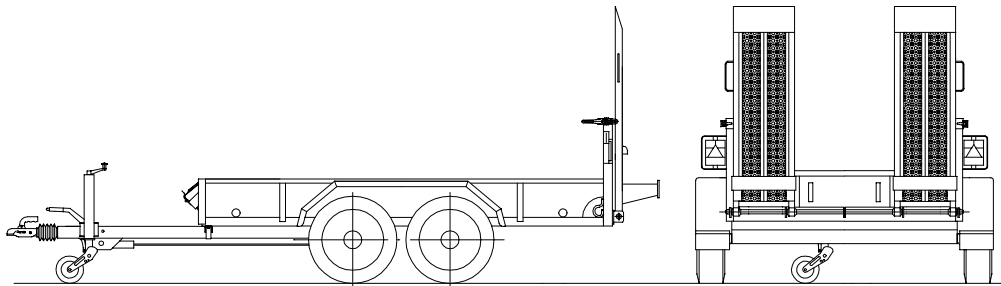

- Axles:** Maintenance-free rubber spring axles with precision bearings
- Brakes:** Surge brake system (with effect to all tyres); immobilisation brake
- Drawbar:** Straight drawbar with car-coupling
- Chassis frame:** self-supporting, buckling resistant frame, sturdily electro welded steel construction made of steel shapes; deep lying focal point between the tyres
- Upper body:** Sidewalls made of steel, front- and sidewalls are strengthened, mudguards made of steel plate, welded on solidly and accessible, plywood wall between the ramps; impregnated wooden bottom made of spruce wood with tongue and groove 30mm strong; lashing hooks in the corners (2000daN) and two pairs of lash rings embedded in the trailer bottom (1500daN)
- Support:** Support wheel in front, fixed support feet on the ramps
- Ramps:** Made of zinc coated perforated metal plate; sideways adjustable and easy to lock by an eccentric clasp
- Electric:** Lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light with an integrated back-up light and a fog warning lamp attached on the steel frame, marker lights sideways, position lights in front); 12-voltage, 13-pole connecting plug
- Varnishing:** Vehicle is galvanized, rims in silver
- Accessories:** Two brake shoes with handle; EC type approval/COC