


Order-No. 556/10500

Tandem Machine transport trailer with sideways adjustable ramps

Weights:	total weight * thereof supportive load – depends on drawing vehicle, please specify! maximum payload in standard model approx. empty weight approx.	10500 Kg* 500 kg 8250 kg 2250 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx. coupling height empty approx. total measures length x width approx.	4500 x 2000 mm 380 mm 720 mm 1800 mm max. ca. 1020 mm 6650 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	2500 mm 500 mm 17° degrees
Tyres:	size	235/75 R 17,5 4-times

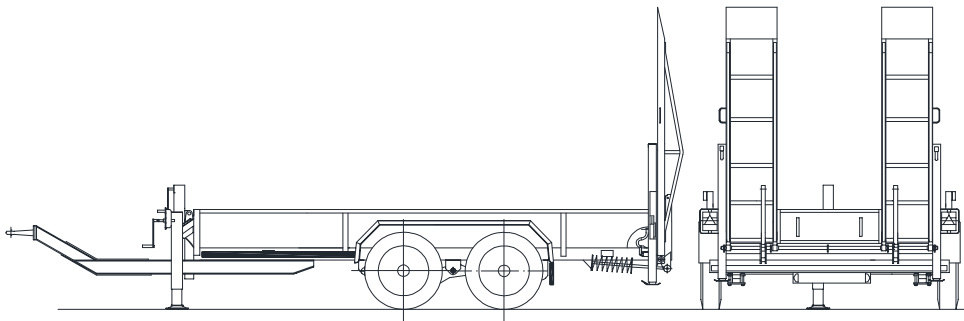

- Axles:** Fast-running BPW axles with a maintenance free parabolic spring assembly, cam brakes and weight adjustment
- Brakes:** Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Self-supporting, buckling resistant frame, sturdily electro welded steel construction made of steel shades
- Upper body:** Sidewalls made of steel, front- and sidewalls are strengthened, all steel parts are welded, mud guard made of edged steel plate, solidly welded and accessible, plywood wall (made of 18mm strong plywood) between the ramps; lashing hooks in the corners with 4000daN, three pair of lashing rings with 2500daN embedded in the trailer bottom (approx. 1,25m in between); Larch-wooden floor impregnated with tongue and groove, 40mm strong; with side protection, stronger underrun protection reg. R58-03
- Support:** Support winch of 10 t in front with load and fast gear, two parking supports in the corner posts in the back assured by support legs
- Ramps:** Sideways adjustable steel ramps with wooden facing and back beam; steel spring as lift support (adjustable) for one-man control, lockable with a quick release clamp
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached in a steel frame, position-, track and side marker lights); 24 voltage, 7- or 15-pole depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with handle, Anti-spray mats, German TÜV homologation, contour marking in accordance with ECE-R 104