


Order-No. 695/11900

**Tandem-Low bed trailer (loading area above axle) with slide in aluminium ramps, EC-type approval**

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	11900 kg 1000 kg 9400 kg 2500 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	5000 x 2450 mm 400 mm 880 mm 1800 mm max. ca. 1020 mm 7000 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	3500 mm 400 mm 14° degrees
Tyres:	size	235/75 R 17,5 4-times

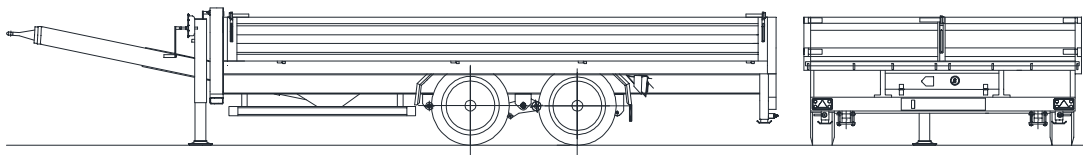

- Axles:** Fast-running BPW axles with cam brakes, maintenance-free parabolic spring assembly and weight adjustment
- Brakes:** Pressure air brake **EBS (24V) with TEM** (automatic park brake), testing sockets, connection hoses with mix-up safe couplings and **spring-loaded brakes**
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** sturdy electro welded steel construction made profile steel (IPE and UNP profiles of the quality S355); through short distances between the cross beams for high punctual load appropriate; side protection, stronger underrun protection reg ECE R58-03
- Upper body:** Steel sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; back wall as a double door; rear posts with double door removable; lashing eyes in the front corners with 4000daN, in the back lashing cases with 4000daN; **with retractable lashing hooks with 3000daN lashing capacity mounted at a distance of 1,20m in the side profile, lashing hook every 60cm possible.** Larch-wood floor impregnated, with tongue and groove, 40mm strong
- Support:** 10t support winch in front with load and fast gear; two parking supports in the rear corner posts with a safety-catch
- Ramps:** Aluminium loading ramps, can be stored below the loading area; supported by rolls; can be locked by a strong steel valve; bearing load/pair 8000kg; weight approx. 59 kg a piece; incl. the storing device in the chassis
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, securely attached in underrun protection, **LED-track-**, position- and marker lights sideways); 24 Volt, 7+7 - or 15-poles depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support, Anti-splash mats, EC-type approval contour marking in accordance with ECE-R 104