


<b>Order-No. 755/11900</b>
----------------------------

## Tandem-Plattform trailer, for the transport of scaffolds, *EC-type approval*

Weights	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	11900 kg 1000 kg 9600 kg 2300 kg
Measures	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	5000 x 2450 mm 400 mm 900 mm 1800 mm max. ca. 1020 mm 7000 x 2550 mm
Tyres:	size	235/75 R 17,5      4-times

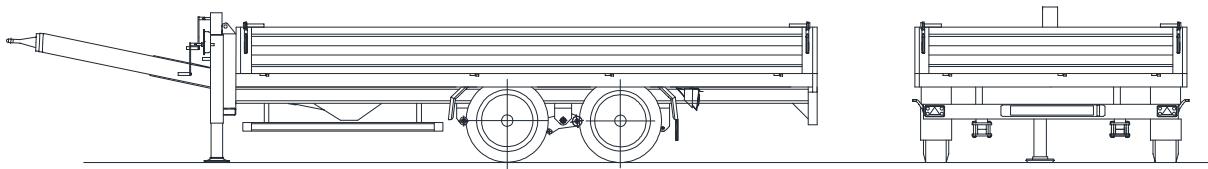

- Axles:** Fast-running BPW axles with S-cam brakes, maintenance-free parabolic spring assembly and weight adjustment
- Brakes:** Pressure air brake **EBS (24V) with TEM** (automatic park brake), testing sockets, connection hoses with mix-up safe couplings and **spring-loaded brakes**
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72m up to 1,02m
- Chassis frame:** Sturdily electro welded steel construction made of steel shades (IPE steel shapes quality S355 and ULP steel shapes)
- Upper body:** Sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; back wall as a tailgate; fixed rear posts; lashing hooks **with 3000 daN** embedded and disappearing in the side profiles approx. each 60cm; floor made of 24mm strong film coated plywood, with side protection, with stronger underrun protection reg. R58-03
- Support:** Adjustable support wheel in front with load and fast gear
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached securely in underrun protection, **LED**-position- and marker lights sideways); 24 voltage, 7+7 - or 15-pole depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support; Anti-splash mats, EC-type approval, contour marking reg. ECE R 104