


Order-No. 756/14000

Tandem-Platform trailer, for the transport of scaffolds, EC-type approval

Weights	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	14000 kg 1000 kg 11500 kg 2500 kg
Measures	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	5000 x 2450 mm 400 mm 1100 mm 1800 mm max. ca. 1020 mm 7000 x 2550 mm
Tyres:	size	285/70 R 19,5 4-times

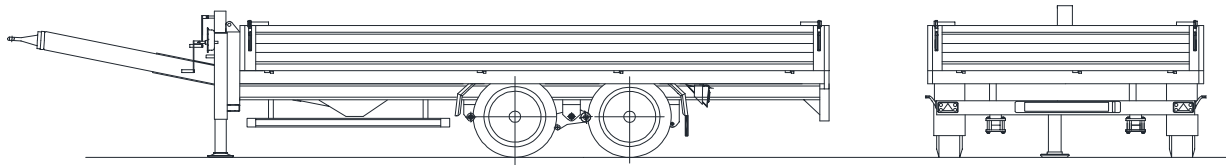

- Axles:** Fast-running BPW axles with S-cam brakes, maintenance-free parabolic spring assembly and weight adjustment
- Brakes:** Pressure air brake **EBS (24V) with TEM** (automatic park brake), testing sockets, connection hoses with mix-up safe couplings and **spring-loaded brakes**
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Sturdily electro welded steel construction made of steel shades (IPE steel shapes quality S355 and ULP steel shapes)
- Upper body:** Sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; back wall as a tailgate; fixed rear posts; lashing hooks with 3000 daN embedded and disappearing in the side profiles approx. each 60cm; floor made of 24mm strong film coated plywood, with side protection, with stronger underrun protection reg. R58-03
- Support:** Adjustable support wheel in front with load and fast gear
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached securely in underrun protection, **LED**-position- and marker lights sideways); 24 voltage, 7+7 - or 15-poles depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support; Anti-splash mats, EC-type approval (COC), contour marking reg. ECE R 104