


Order-No. 845/5000

**Tandem-three side tipper and low bed trailer, with slide-in aluminium loading ramps, COC**

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	5000 kg 500 kg 3100 kg 1900 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	4000 x 2300 mm 400 mm 850 mm 1800 mm max. approx. 1020 mm 6000 x 2400 mm
Ramps:	length approx. width approx. elevation approx.	3000 mm 300 mm 16° degrees
Hydraulic system:	Tilting angle backwards /sideways approx. oil consumption approx.	45°/45° degrees 4,2 litres
Tyres:	Size	215 R 14 C 4-times

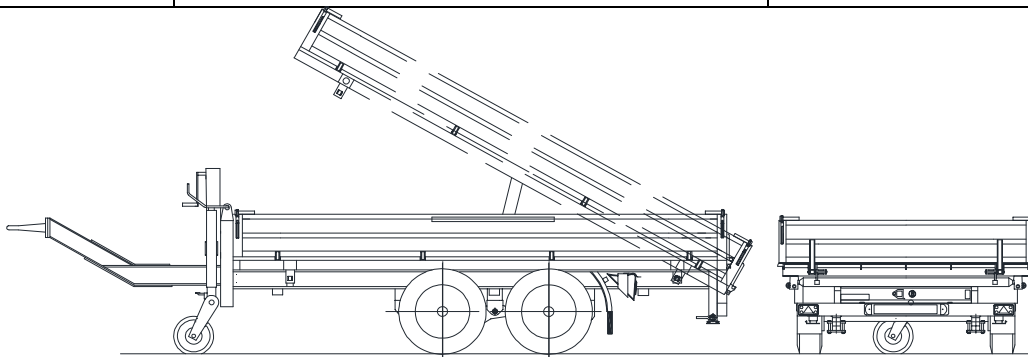

<b>Axles:</b>	Fast-running axles by Knott with cam brakes, leaf spring and weight adjustment
<b>Brakes:</b>	Pressure air brake, testing sockets, connection hoses with mix-up safe couplings, antilock braking system (ABS), immobilisation brake
<b>Drawbar:</b>	Drawbar made of hot-manufactured hollow profile of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
<b>Chassis frame:</b>	Electro-welded, sturdy construction made of prime steel, stronger underrun protection reg ECE R58-03
<b>Upper body:</b>	Tipper floor made of 4mm fine grained steel QSTE 380; tilt frame made of a robust construction with half ball shells (noise absorbing); sidewalls laser welded and can be folded sideways by strong hinges; tailboard oscillating; corner posts pluggable in the back; lash trays (2500daN) approx. every 1,25m embedded in the bottom, 2 lash eyes in front (4000daN), 2 lash rings in the back (4000daN) welded on
<b>Hydraulic system:</b>	Motor-hydraulic; with heavy 3-step tip cylinder and lift limiter; plug coupling and single circuit connection
<b>Support:</b>	An adjustable support wheel in front; two parking supports in the back assured by support legs
<b>Ramps:</b>	Aluminium loading ramps, can be stored below the loading area; supported by rolls; can be locked by a strong steel valve; bearing load/pair 3500kg; weight approx. 37 kg a piece
<b>Electric:</b>	Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, securely attached in underrun protection, LED-track- and position-lights sideways); 24 voltage, 7+7 - or 15-pole depending on customers request
<b>Varnishing:</b>	Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
<b>Accessories:</b>	Two brake shoes with handle; Anti-spray mats, EC-type approval