


Bestell-Nr. 899/18000

Tandem-Two side tipper and low bed trailer, with fixed ramps at the back, twin tyres, with COC/EC type approval

| | | |
|------------|---|---|
| Weights: | Total weight* Thereof support load Payload in standard equipment approx. Empty weight approx. | 18000 Kg 1000 kg 13600 kg 4400 kg |
| Measures: | Loading area inside approx. (Length x Width) Side height Loading height empty approx. Drawbar length approx. Coupling height empty approx. Total measures length x width approx. | 5000 x 2420 mm 450 mm 980 mm 1800 mm max. ca. 1020 mm 7350 x 2550 mm |
| Ramps: | Length approx. Width approx. Elevation approx. | 2700 mm 600 mm 17° degree |
| Hydraulic: | Tipping angle backwards/sideways approx. Oil demand approx. | 45° degree 9,0 liters |
| Tyres: | Size | 235/75 R 17,5 8-times |

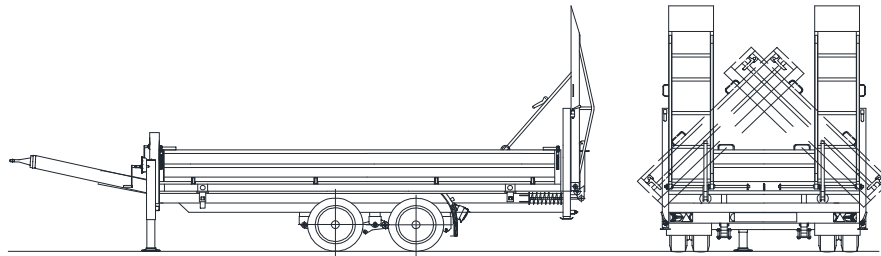

- Axles:** Fast-running axles **type BPW** with cam brakes, maintenance-free parabolic spring assembly and weight adjustment
- Brakes:** Pressure air brake **EBS (24V) with TEM** (automatic park brake), testing sockets, connection hoses with mix-up safe couplings and **spring-loaded brakes**
- Drawbar:** Drawbar made of hot-manufactured hollow profile of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72m up to 1,02m
- Chassis frame:** Sturdy electro welded steel construction made of profile steel (IPE and UNP profiles of the quality S355), stronger underrun protection reg ECE R58-03
- Upper body:** Floor made of one panel of **HARDOX® steel of the quality 450**; tipping frame in a sturdy design with 4 half ball shells (noise absorbing), all around steel walls made of fine grain steel, hinged sideways with strong hinges; back steel wall swivel-mounted with central locking; rear posts pluggable; 1 pair of lashing trays (2500 daN) welded in the middle of the floor, in the corners lashing hooks (4000daN), lashing rings (4000daN) welded at the back, with fixed corner posts at the back, drive-through width at 2,35m
- Hydraulics:** Motor hydraulics, with two 4-layer tipping cylinders and stroke limiter, plug coupling as single circuit connection
- Support:** At the front 12to gear supported jack with load and overdrive speed; at the back two supporting jacks with mechanical protection
- Ramps:** Sideways adjustable steel ramps with wooden surface; adjustable ramp spring lifter for one-man operation; stay in an upright position during tipping
- Electrics:** Splash-waterproof lighting regarding ECE-direction ECE-R 48.03 (multi-chamber light, mounted in a steel case, LED-side lights), 24V, 7+7- or 15-poles
- Varnishing:** Steel parts grit blasted and pretreated, electrostatically primed and varnished with iron phosphating; anticorrosive zinc-phosphate priming; electrostatically varnished in two Acrylic-RAL colours (High-Solid) to your information, finished with cavity sealing with wax
- Accessories:** 2 brake shoes with holders, Anti spray mats, **COC/EC type-approval**