


Order-No. 569/11900

Tandem-Machine transport trailer „AWST“ (loading area between axles) with sideways adjustable ramps – especially for the transport of milling machines and fork lifts; with EC type approval/COC

Weights:	total weight thereof supportive load maximum payload in standard model approx. empty weight approx.	11900 kg 1000 kg 9500 kg 2400 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx. coupling height empty approx. total measures length x width approx.	4500 x 2000 mm 370 mm 730 mm 1800 mm max. ca. 1020 mm 6650 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	2200 mm 500 mm 12° degrees
Tyres:	size	235/75 R 17,5 4-times with valve sensors for TPMS

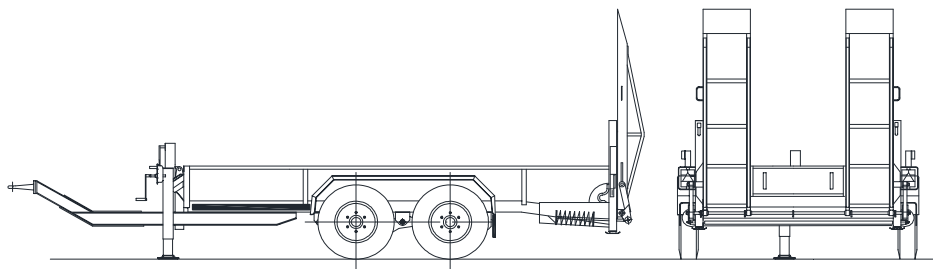

- Axles:** Fast-running axles type BPW, with a maintenance free parabolic spring assembly, cam brakes and weight adjustment
- Brakes:** **EBS** air brake system (multi-voltage with 24V plug-in connection in accordance with ISO 7638-01) with TEM (automatic parking brake), test connections, connecting hoses with interchangeable coupling heads and **spring-loaded brake**
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Self-supporting, buckling resistant frame as sturdy electro welded steel construction made of steel shades
- Upper body:** Sidewalls made of steel, front- and sidewalls are strengthened, all steel parts are welded, mud guard made of edged steel plate, solidly welded and accessible, plywood wall (made of 18mm strong plywood) between the ramps; lashing hooks in the corners with 4000daN, three pair of lash rings with 2500daN embedded in the trailer bottom (approx. 1,25m in between); Larch-wood floor impregnated with tongue and groove, 50mm strong – for high punctual loads; approx. 1m of the loading area is bevelled in the back, with side protection, with stronger underrun protection reg. R58-03
- Support:** Support winch in front with load and fast gear, two parking supports in the corner posts in the back assured by support legs
- Ramps:** Sideways adjustable steel ramps with wooden facing and back beam; steel spring as lift support (adjustable) for one-man control, ramps lockable with quick release clamp
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.06 (Multi-chamber light, attached in a steel frame, **LED**-position-, track and side marker lights); 24 voltage, 7+7- or 15-poles depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** **Tire Pressure Management System (TPMS)**; two brake shoes with handle, Anti-splash mats, with EC type approval (COC), contour marking in accordance with ECE-R 104, homologation documents