


Order no. 674/11900

Tandem low bed trailer with side-adjustable ramps, twin tires, EC type approval

Weights:	Total weight of which drawbar load Payload with standard equipment approx. empty weight approx.	11900 kg 1000 kg 9150 kg 2750 kg
Dimensions:	Loading dimension inside approx. (length x width) Dropside height approx. loading height unloaded approx. drawbar length approx. coupling height unloaded approx. overall dimensions length x width approx.	5000 x 2450 mm 400 mm 850 mm 1800 mm max. approx. 1020 mm 7150 x 2550 mm
Ramps:	Length approx. width approx. drive-on angle approx.	2500 mm 600 mm 14° Degree
Tires:	Size	215/75 R 17.5 8-times with valve sensors for RDK

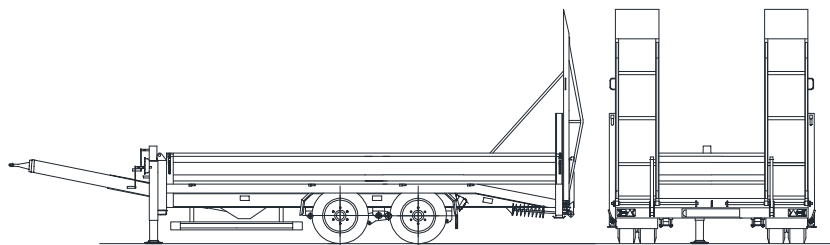

- Axles:** BPW high-speed axles with S-cam brake and maintenance-free parabolic spring unit with load compensation
- Brake system:** EBS air brake system (multi-voltage with 24V plug-in connection in accordance with ISO 7638-01) with **TEM** (automatic parking brake), test connections, connecting hoses with interchange-proof coupling heads and **spring-loaded brake**
- Pulling device:** Drawbar made of hot-finished S355 grade hollow section, infinitely height-adjustable via spindle winch, with truck DIN towing eye (40 mm), height adjustable from approx. 0.72 m to 1.02 m
- Chassis:** Robust welded construction made of sectional steel (including IPE and UNP profiles, grade S355), electrically welded; suitable for point loading due to short crossbar spacing, side impact protection, reinforced underride guard in accordance with ECE R58-03
- Structure:** Laser-welded steel drop sides; fixed end wall made of drop side profile, side walls can be folded down and removed; *retractable lashing brackets with 3000daN according to UVV/VSG (at intervals of approx. 1.20m - with a length of 5.0m = 4 pairs) mounted on the outside in the side profile, lashing brackets possible every 60cm, lashing hooks/recesses with 4000daN in the corners. Larch wood floor 40mm thick, impregnated, with tongue and groove; rear loading area approx. 1.00m slanted, rear corner posts can be removed up to the top edge of the loading area, steel plate can be removed from the side - unrestricted drive-through width*
- Support:** A 10 t geared support winch with load and high-speed gear at the front, two parking supports in the corner posts with support leg safety device at the rear
- Ramps:** Laterally adjustable steel ramps with wooden decking and beam; adjustable spring-loaded ramp hoist for one-man operation, can be locked using tension locks, **additionally secured with lashing straps**
- Electrics:** Splash-proof lighting in accordance with ECE regulation ECE-R 48.06 (multi-chamber light, protected in the underride guard, **LED side marker**, clearance and license plate lights); 24 volt, 7+7 or 15-pin as specified
- Paintwork:** Steel parts steel grit blasted, pre-treatment with iron phosphating; corrosion-inhibiting zinc phosphate primer, electrostatic painting in acrylic RAL shade (high-solid) as specified, followed by cavity sealing with preservative wax
- Accessories:** **Tire pressure monitoring system (TPMS)**, 2 brake shoes with holder; AntiSpray mats, EC type approval; registration documents; contour markings in accordance with ECE R 104