


Order-No. 692/8900

Tandem-Low bed trailer (loading area above axle) with slide in aluminium ramps, EC-type approval

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	8900 kg 500 kg 6800 kg 2100 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	5000 x 2450 mm 400 mm 850 mm 1800 mm max. ca. 1020 mm 7000 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	3300 mm 400 mm 15° degrees
Tyres:	size	215/75 R 17,5 4-times

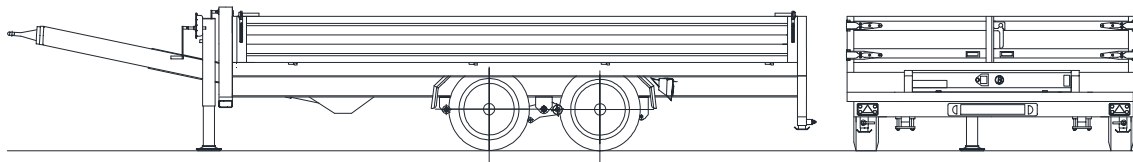

- Axles:** Fast-running axles type GFA with S-cam brakes, leaf spring and weight adjustment
- Brakes:** Pressure air brake with release valve, ALB, testing sockets, connection hoses with mix-up safe couplings, 24V-antilock braking system (ABS), immobilisation brake
- Drawbar:** Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
- Chassis frame:** Sturdily electro welded steel construction made of steel shades; through short distances between the cross beams for high punctual load appropriate
- Upper body:** Steel sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; lashing eyes in the corners with 4000daN; retractable lashing rings with 3000daN approx. every 1,2m embedded outside in the side profiles, lashing rings possible every 60cm; wooden bottom made of spruce wood with tongue and groove, approx. 44mm strong; with side protection, with stronger underrun protection reg. R58-03
- Support:** Support winch in front with load and fast gear; two parking supports in the rear corner posts with a safety-catch
- Ramps:** Aluminium loading ramps, can be stored below the loading area; supported by rolls; can be locked by a strong steel valve; bearing load/pair 8000kg; weight approx. 56 kg a piece; incl. the storing device in the chassis
- Electric:** Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached securely in underrun protection, LED-track-, position- and marker lights sideways); 24 voltage, 7+7 - or 15-pole depending on customer's request
- Varnishing:** Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
- Accessories:** Two brake shoes with support, Anti-splash mats, EC-type approval (COC), contour marking in accordance with ECE-R 104